





## Data sheet EKS 4815.0 Corruloc

Our Corruloc EKS 4815.0

- serves as a detachable connection of several layers
- sits flush on the front side due to the spring elements on the locking latches
- is suitable for connection distances up to 30 mm
- consists of four individual parts which can be easily mounted on the packaging
- is closed by a 90° clockwise rotation all the way to the stop or opened by a rotation in the opposite direction (self-explanatory symbols)
- wears out only slightly on the outside and inside and requires no mounting space on the rear side
- is reusable
- stays in position even when it is open
- is part of our E-K-S Bioline®
- 100% recyclable



### Technical specification:

Weight approx. 45.00 gr.


Raw material depending on the variant:

- 100% PP- Recycled material (PCR)
- 70% PP (standard material) / 30 % PP regranulate (PIR)
- 100% E-K-S Bioline® sugar cane

### Packaging:

250 pcs. / 11.9 kg

### Assembling data:

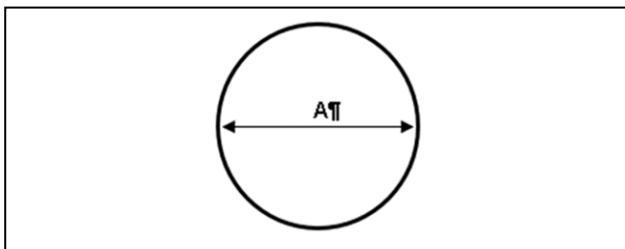

Assembling data  
(punching)

A = 64 mm (+-1mm)



Did you already know that we can also manufacture our products from biological raw materials on request? We will be pleased to provide you with further information!

