





Data sheet

EKS 892.0 Clamping fastener/lock

Our Clamping fastener/lock EKS 892.0

- is suitable as detachable connection of several layers of corrugated cardboard and is used for locking and making complex packages
- is suitable for cardboard boxes with wall thicknesses up to 27.5 mm
- permits repeated closing and opening
- can be a useful alternative to adhesive tapes
- facilitates a type-specific separation of packaging materials
- is a larger design in comparison to Clamping fastener EKS 891.0
- is part of our E-K-S Bioline®
- 100% recyclable

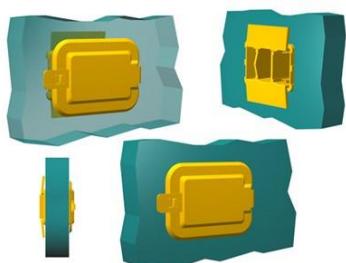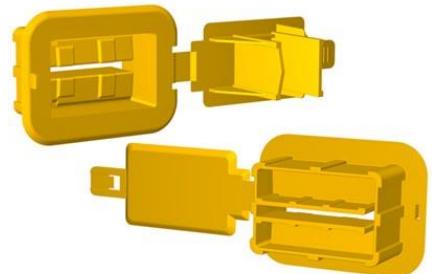

Technical specification:

Weight approx. 32.10 gr.


Raw material depending on the variant:

- 100% PP- Recycled material (PCR)
- 70% PP (standard material) / 30 % PP regranulate (PIR)
- 100% E-K-S Bioline® sugar cane

Packaging:

200 pcs. / 7.6 kg
250 pcs. / 9.2 kg

Assembling data:

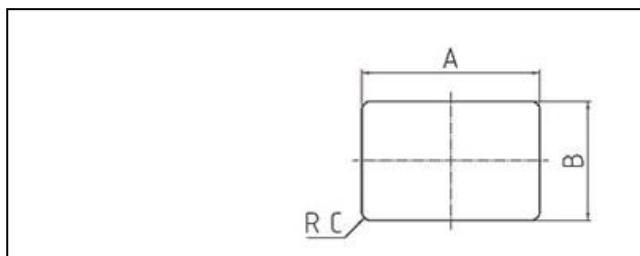

Assembling data
(punching)

A = 60 mm (+-1mm)
B = 40 mm (+-1mm)
C = 3 mm (+-1mm)



Did you already know that we can also manufacture our products from biological raw materials on request? We will be pleased to provide you with further information!

