




- serves for the detachable connection of multiple layers
- additional securing function by means of a locking pin and a seal
- has only a minimal profile on both the outside and inside and, in particular, requires no installation clearance on the reverse side
- is a sustainable alternative to adhesive tapes or staples
- facilitates the type-specific separation of packaging materials
- is suitable for repeated use
- is suitable for connection distances of up to 8 mm
- is also available in versions for connection distances of up to 14 mm, 15 mm, 18 mm, 21 mm, 22 mm and 26 mm
- 100% recyclable

Assembling data

(Punching)

- A = 50 mm (+/-1mm)
- B = 93 mm (+/-1mm)
- C = 27 mm (+/-1mm)
- R = 3 mm (+/-1mm)

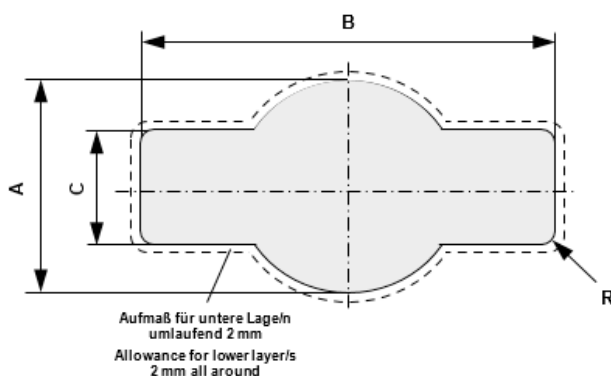

Technical specification

Weight approx. 20,30 gr.

Raw material depending on the variant:

- 100% PP-Recycled material (PCR)
- 100% E-K-S Bioline® Sugar cane
- 100% E-K-S Bioline® Paper fiber



Packaging

150 Units / 3,8 kg
750 Units / 16,6 kg

