




- serves as a detachable connection of several layers of corrugated cardboard
- the insertion bevel simplifies screwing into the packaging
- vibration protection fixes the bayonet lock in case of vibration
- is a sustainable alternative to adhesive tapes or staples
- facilitates the separation of packaging materials by type
- is reusable
- is suitable for connection distances up to 21 mm
- is also available in versions for connection distances of 8 mm, 14 mm, 18 mm, 15 mm, 22 mm and 26 mm
- 100% recyclable

## Assembling data

(Punching)

- A = 50 mm (+/-1mm)
- B = 93 mm (+/-1mm)
- C = 27 mm (+/-1mm)
- R = 3 mm (+/-1mm)

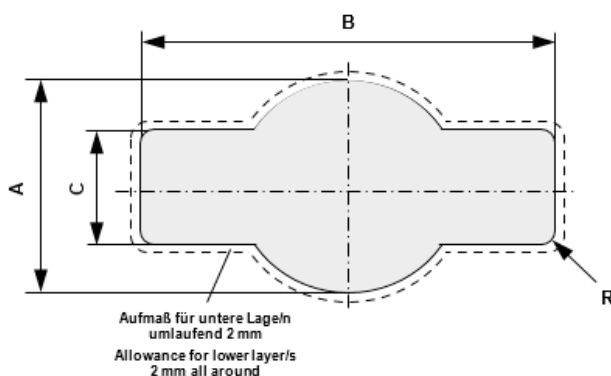

## Technical specification

Weight approx. 22,20 gr.

Raw material depending on the variant:

- 100% PP-Recycled material (PCR)
- 100% E-K-S Bioline® Sugar cane
- 100% E-K-S Bioline® Paper fiber



## Packaging

100 Units / 2,9 kg  
400 Units / 10,1 kg

