




- provides a detachable connection between multiple layers
- features an extended fixing tab for easier installation
- has a low profile on both the inside and outside and requires no installation clearance, particularly on the rear side
- is a sustainable alternative to adhesive tape or staples
- facilitates the separation of packaging materials by type
- is suitable for connection distances of up to 9 mm
- is also available in versions for connection distances of up to 14 mm and 20 mm
- 100% recyclable in the paper recycling stream

Assembling data

(Punching)

- A = 66 mm (+/-1mm / dimensions inner layer)
- B = 62 mm (+/-1mm / dimensions outer layer)
- R¹ = 23 mm (+/-1mm / dimensions inner layer)
- R² = 24,5 mm (+/-1mm / dimensions outer layer)

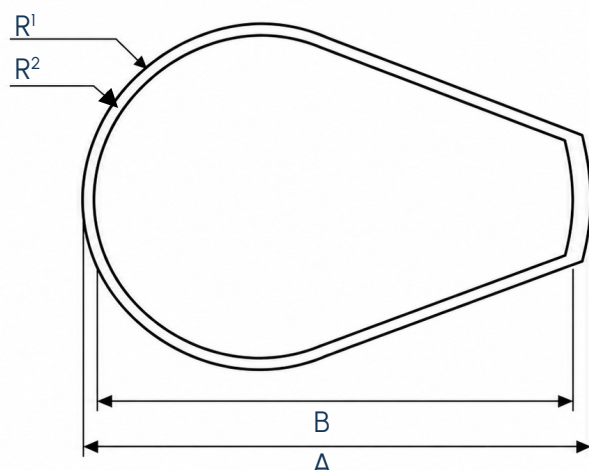

Technical specification

Weight approx. 16,80 gr.

Raw materials depending on variant:

- 100% Paper



Packaging

Upon request

